

Bulk Cables

2.54mm Flexible Flat Copper Cable



PRODUCT DETAILS

The Flex Connection range of Flexible Flat Copper Cables are manufactured by laminating tin plated copper conductors between two layers of tough, flexible, flame retardant UL VW-1 rated polyester/adhesive Insulators. Cables can be supplied in bulk on roll format or cut to length. We can also supply them terminated with industry standard connectors.

FEATURES

 Highly Flexible

 Light Weight

 Extremely Thin

 Cost-Effective


 Suitable to Fold

 Can be Shielded

TABLE

No. of Conductor	Conductor Size Thickness	Width	Dimensions P(mm)	CW(mm)	No. of Conductor	Conductor Size Thickness	Width	Dimensions P(mm)	CW(mm)
2	0.076	1.57	2.54±0.2	7.62±0.3	22	0.076	1.57	53.34±0.5	58.42±0.6
3	0.076	1.57	5.08±0.2	10.16±0.3	23	0.076	1.57	55.88±0.5	60.96±0.6
4	0.076	1.57	7.62±0.2	12.70±0.3	24	0.076	1.57	58.42±0.5	63.50±0.6
5	0.076	1.57	10.16±0.2	15.24±0.3	25	0.076	1.57	60.96±0.5	66.04±0.6
6	0.076	1.57	12.70±0.2	17.78±0.3	26	0.076	1.57	63.50±0.5	68.58±0.6
7	0.076	1.57	15.24±0.3	20.32±0.4	27	0.076	1.57	66.04±0.5	71.12±0.6
8	0.076	1.57	17.78±0.3	22.86±0.4	28	0.076	1.57	68.58±0.5	73.66±0.6
9	0.076	1.57	20.32±0.3	25.40±0.4	29	0.076	1.57	71.12±0.5	76.20±0.6
10	0.076	1.57	22.86±0.3	27.94±0.4	30	0.076	1.57	73.66±0.5	78.74±0.6
11	0.076	1.57	25.40±0.3	30.48±0.4	31	0.076	1.57	76.20±0.6	81.28±0.7
12	0.076	1.57	27.94±0.4	33.02±0.5	32	0.076	1.57	78.74±0.6	83.82±0.7
13	0.076	1.57	30.48±0.4	35.56±0.5	33	0.076	1.57	81.28±0.6	86.36±0.7
14	0.076	1.57	33.02±0.4	38.10±0.5	34	0.076	1.57	83.82±0.6	88.90±0.7
15	0.076	1.57	35.56±0.4	40.64±0.5	35	0.076	1.57	86.36±0.6	91.44±0.7
16	0.076	1.57	38.10±0.4	43.18±0.5	36	0.076	1.57	88.90±0.6	93.98±0.7
17	0.076	1.57	40.64±0.4	45.72±0.5	37	0.076	1.57	91.44±0.6	96.52±0.7
18	0.076	1.57	43.18±0.4	48.26±0.5	38	0.076	1.57	93.98±0.6	99.06±0.7
19	0.076	1.57	45.72±0.4	50.80±0.5	39	0.076	1.57	96.52±0.6	101.60±0.7
20	0.076	1.57	48.26±0.4	53.34±0.5	40	0.076	1.57	99.06±0.6	104.14±0.7
21	0.076	1.57	50.80±0.5	55.88±0.6					


DIMENSION OUTLINE

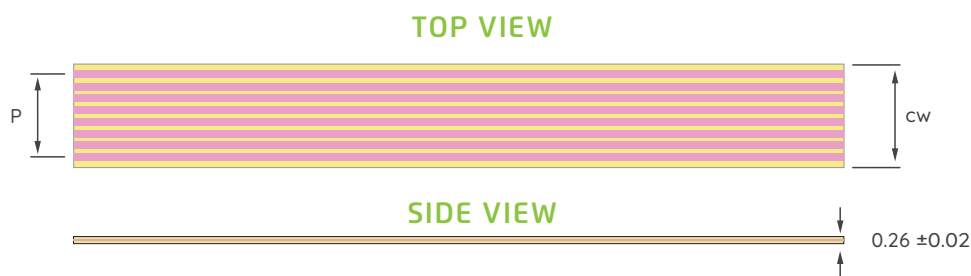

ELECTRICAL AND MECHANICAL PROPERTIES

Material	Flat Copper Conductor Laminated between 2 layers of Polyester Insulation
Pitch	2.54mm±0.1
Number of Conductors	2-40 ways
Conductor Size	1.57mm (width) x 0.076mm thick bare copper
Insulation Thickness	0.1mm
Conductor Resistance	<0.2 Ω/M
Insulation Resistance	Over 1,000m Ω/M @ 2000 VDC (20°C)
Operating Voltage	300V RMS
Conductor Rating	3A AC/Conductor
Dielectric Strength	1000V AC for 1 Min between Conductors
Operating Temperature	-55°C to 105°C
UL Flammability Rating	VW-1

PART NUMBERING BREAKDOWN

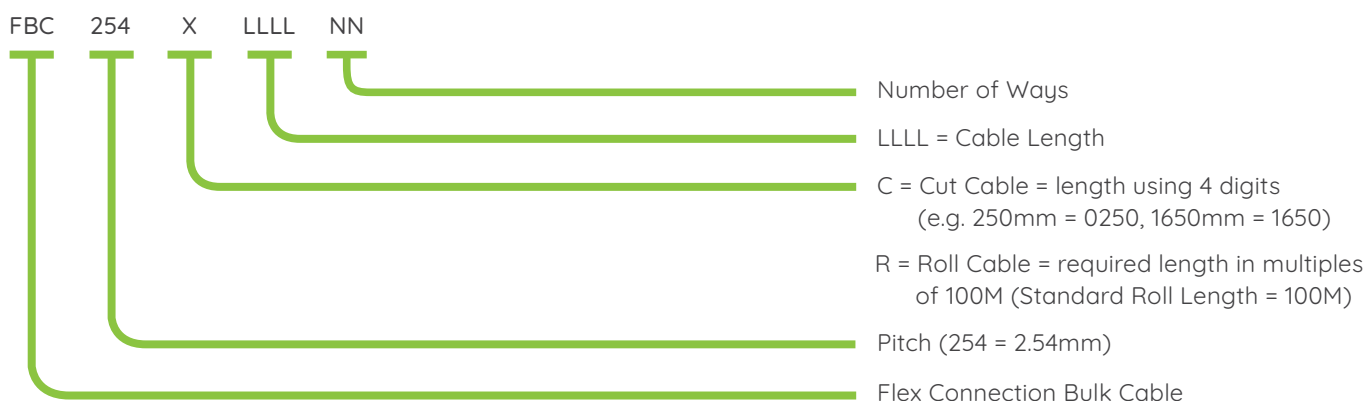

1st Jan 2017 Issue 1

2025 Flex Connection

flexconnection.global

Europe

Unit 8 Campus Five
 Third Avenue Letchworth
 Hertfordshire SG6 2JF
 United Kingdom
 T +44 1462 341125
 F +44 1462 677499
 E sales@flexconnection.eu

North America

4500 Red Arrow Hwy Unit E
 Stevensville
 Michigan
 49127 USA
 T +1 269 408 8400
 F +1 269 593 5952
 E sales@flexconnection.net

Hong Kong

Unit 5/6 6F Westley Square
 48 Hoi Yuen Road
 Kwun Tong
 Hong Kong
 T +852 3523 1884
 F +852 3747 8980
 E sales@flexconnection.asia

China

Unit 613A-615 Floor 6 Block A
 Commercial Bldg 99 Dahe
 Road Guanlan Long Hua
 District Shenzhen China
 T +86 755 2798 1678
 F +86 755 2263 8887
 E sales@flexconnection.cn

Brazil

Avenida Cassiano Ricardo
 nº 601 Sala 61 Jd. Aquarius
 Ed. The One Office Tower
 São José dos Campos
 SP 12246-870 Brazil
 T +55 11 99013-3030
 E sales@flexconnection.com.br