


1.27mm Flat Flex Jumper Cable





Female to Female

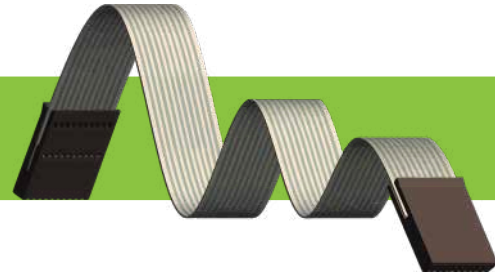








PRODUCT DETAILS

The Flex Connection range of Flat Flex Jumper Cables are manufactured with Flexible Flat Cables (FFCs) produced by laminating tin plated copper conductors between 2 layers of tough, flexible flame retardant UL VW-1 rated polyester insulators. We terminate either end of the Jumper Cable with connectors from leading manufacturers such as Memcon, Tyco, Nicomatic and others. Flex Connection Jumpers provide high reliability and retention compared to traditional FFCs used with ZIF/LIF products with low contact resistance and high current options while maintaining a high level of flexibility.

FEATURES

-  Highly Flexible
-  Light Weight
-  Extremely Thin
-  Quality Design
-  Suitable to Fold

APPLICATIONS

-  Domestic Appliance
-  IT Equipment
-  Consumer Electronics
-  Automotive Industry
-  Office Equipment
-  Robotics
-  Industrial
-  Telecommunications


MATING CONNECTOR



MPTB-X-1-XX

DIMENSION OUTLINE


TOP VIEW

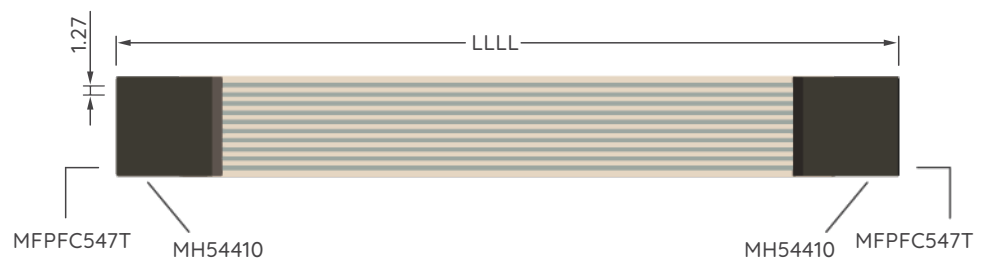

SIDE VIEW




CONTACT AND HOUSING OPTIONS

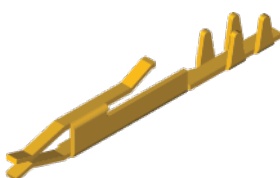

Full or Selective Gold Plating



Polarized and Latching

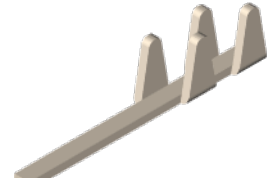


Short Male Solder Tab


ELECTRICAL AND MECHANICAL PROPERTIES

Flat Cable Material	Tin Plated Copper Conductor Laminated between two layers of Polyester Insulation
Housing Style	MH544 Standard Female Housing
Housing Material	Thermoplastic Glass Fibre UL94-VO
Contact Style	MFPFC547T High Insertion Force Female Contact
Contact Material	0.20 mm thick Phosphor Bronze
Pitch	1.27mm
Number of Conductors	2 to 30 ways as standard
Conductor Size	0.65mm (width) x 0.1mm thick tin plated copper
Conductor Rating	3A AC/Conductor
Operating Voltage	300V RMS
Dielectric Strength	3000V AC
Resistance	0.27 Ω /M


OTHER OPTIONS




FOLDING



BENDING



SHIELDING




LABELING



SLEEVING

PART NUMBERING BREAKDOWN

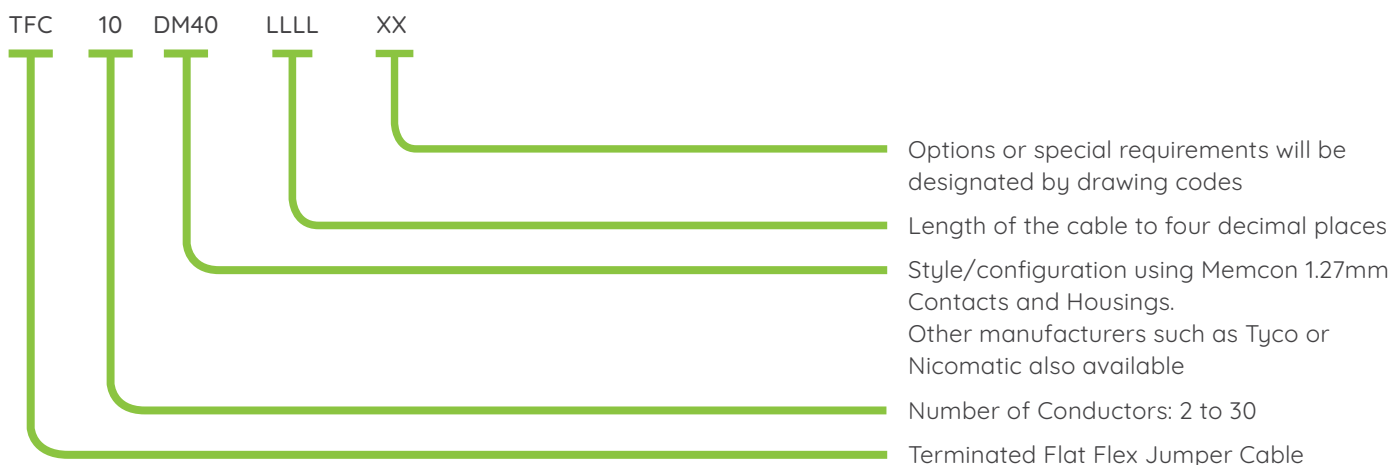

1st Jan 2017 Issue 1

2025 Flex Connection

flexconnection.global

Europe

Unit 8 Campus Five
Third Avenue Letchworth
Hertfordshire SG6 2JF
United Kingdom
T +44 1462 341125
F +44 1462 677499
E sales@flexconnection.eu

North America

4500 Red Arrow Hwy Unit E
Stevensville
Michigan
49127 USA
T +1 269 408 8400
F +1 269 593 5952
E sales@flexconnection.net

Hong Kong

Unit 5/6 6F Westley Square
48 Hoi Yuen Road
Kwun Tong
Hong Kong
T +852 3523 1884
F +852 3747 8980
E sales@flexconnection.asia

China

Unit 613A-615 Floor 6 Block
A Commercial Bldg 99 Dahe
Road Guanlan Long Hua
District Shenzhen China
T +86 755 2798 1678
F +86 755 2263 8887
E sales@flexconnection.cn

Brazil

Avenida Cassiano Ricardo
n° 601 Sala 61 Jd. Aquarius
Ed. The One Office Tower
São José dos Campos
SP 12246-870 Brazil
T +55 11 99013-3030
E sales@flexconnection.com.br