


2.54mm Flat Flex Jumper Cable

Female to Male Solder Tab





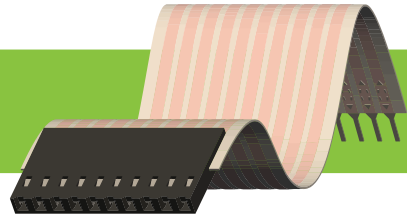





PRODUCT DETAILS

The Flex Connection range of Flat Flex Jumper Cables are manufactured with Flexible Flat Cables (FFCs) produced by laminating bare copper conductors between 2 layers of tough, flexible flame retardant UL VW-1 rated polyester insulators. We terminate either end of the Jumper Cable with connectors from leading manufacturers such as Memcon, Tyco, Nicomatic and others. Flex Connection Jumpers provide high reliability and retention compared to traditional FFCs used with ZIF/LIF products with low contact resistance and high current options while maintaining a high level of flexibility.

FEATURES

-  Highly Flexible
-  Light Weight
-  Extremely Thin
-  Quality Design
-  Suitable to Fold

APPLICATIONS


-  Domestic Appliance
-  IT Equipment
-  Consumer Electronics
-  Automotive Industry
-  Medical Applications
-  Robotics
-  Telecommunications
-  Industrial

MATING CONNECTOR




PCB Header MSPTAS series

DIMENSION OUTLINE

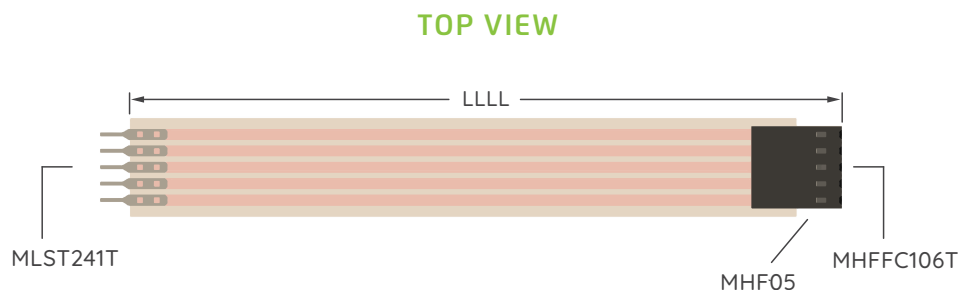

MATING PCB



SIDE VIEW



CONTACT AND HOUSING OPTIONS



High Force
Female Contact



Low Force
Female Contact



Full or Selective
Gold Plating



Short Male
Solder Tab




Polarised and
Latching Housing


ELECTRICAL AND MECHANICAL PROPERTIES

Flat Cable Material	Flat Copper Conductors laminated between 2 layers of White Polyester Insulation
Housing Style	MHF Standard Housing
Housing Material	Thermoplastic with Glass Fibre UL94 VO Rated
Contact Style	0.20mm thick Phosphor Bronze
Contact Material	MLST241T Solder Tab and MHFFC106T Hi Flex Female
Pitch	2.54mm
Number of Conductors	2 to 26 ways as standard
Conductor Size	1.57mm (width) x 0.076mm thick bare copper
Operating Voltage	300V RMS
Dielectric Strength	Over 1000 M Ω /M @2000VDC (20 deg C)
Resistance	<0.2 Ω /M


OTHER OPTIONS




FOLDING




BENDING



SHIELDING




LABELING



SLEEVING

PART NUMBERING BREAKDOWN

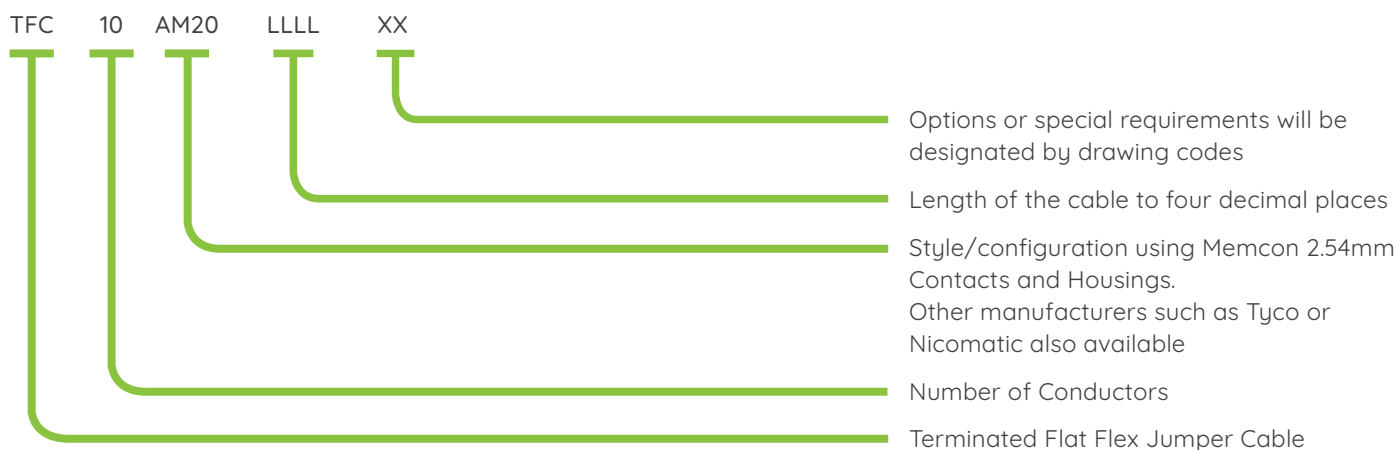

Europe

Unit 8 Campus Five
Third Avenue Letchworth
Hertfordshire SG6 2JF
United Kingdom
T +44 1462 341125
F +44 1462 677499
E sales@flexconnection.eu

North America

4500 Red Arrow Hwy Unit E
Stevensville
Michigan
49127 USA
T +1 269 408 8400
F +1 269 593 5952
E sales@flexconnection.net

Hong Kong

Unit 5/6 6F Westley Square
48 Hoi Yuen Road
Kwun Tong
Hong Kong
T +852 3523 1884
F +852 3747 8980
E sales@flexconnection.asia

China

Unit 613A-615 Floor 6 Block
A Commercial Bldg 99 Dahe
Road Guanlan Long Hua
District Shenzhen China
T +86 755 2798 1678
F +86 755 2263 8887
E sales@flexconnection.cn

Brazil

Avenida Cassiano Ricardo
n° 601 Sala 61 Jd. Aquarius
Ed. The One Office Tower
São José dos Campos
SP 12246-870 Brazil
T +55 11 99013-3030
E sales@flexconnection.com.br